

## LQ64D343

Color TFT-LCD Module  
(FA/POS/Measuring instruments)

### Features

- 16 cm [6.4"] VGA format
- Built-in long life CCFT backlight (50 000 h)
- Wide viewing angle  
(Horizontal: 120° Vertical: 90°)
- Anti glare treatment
- High brightness (300 cd/m<sup>2</sup>)
- Low reflectance


### Specifications

Parameter		Unit
Display size	16 [6.4]	cm ["]
Dot format (H x V)	640 x RGB x 480	dot
Dot pitch (H x V)	0.068 x 0.202	mm
Active area (H x V)	130.6 x 97.0	mm
Color	262 144	-
Input signal	6-bit Digital RGB	-
Viewing direction	6:00	-
Backlight type	2CCFT(E)	-

Parameter		Unit
Brightness	300	cd/m <sup>2</sup>
Contrast ratio	300 : 1	-
Power consumption	5.57	W
Outline dimensions (W x H x D)	175.0 x 126.5 x 12.0	mm
Weight	290	g
Operating temperature	0 to +55	°C
Storage temperature	-25 to +70	°C

### Outline Dimensions

unit : mm

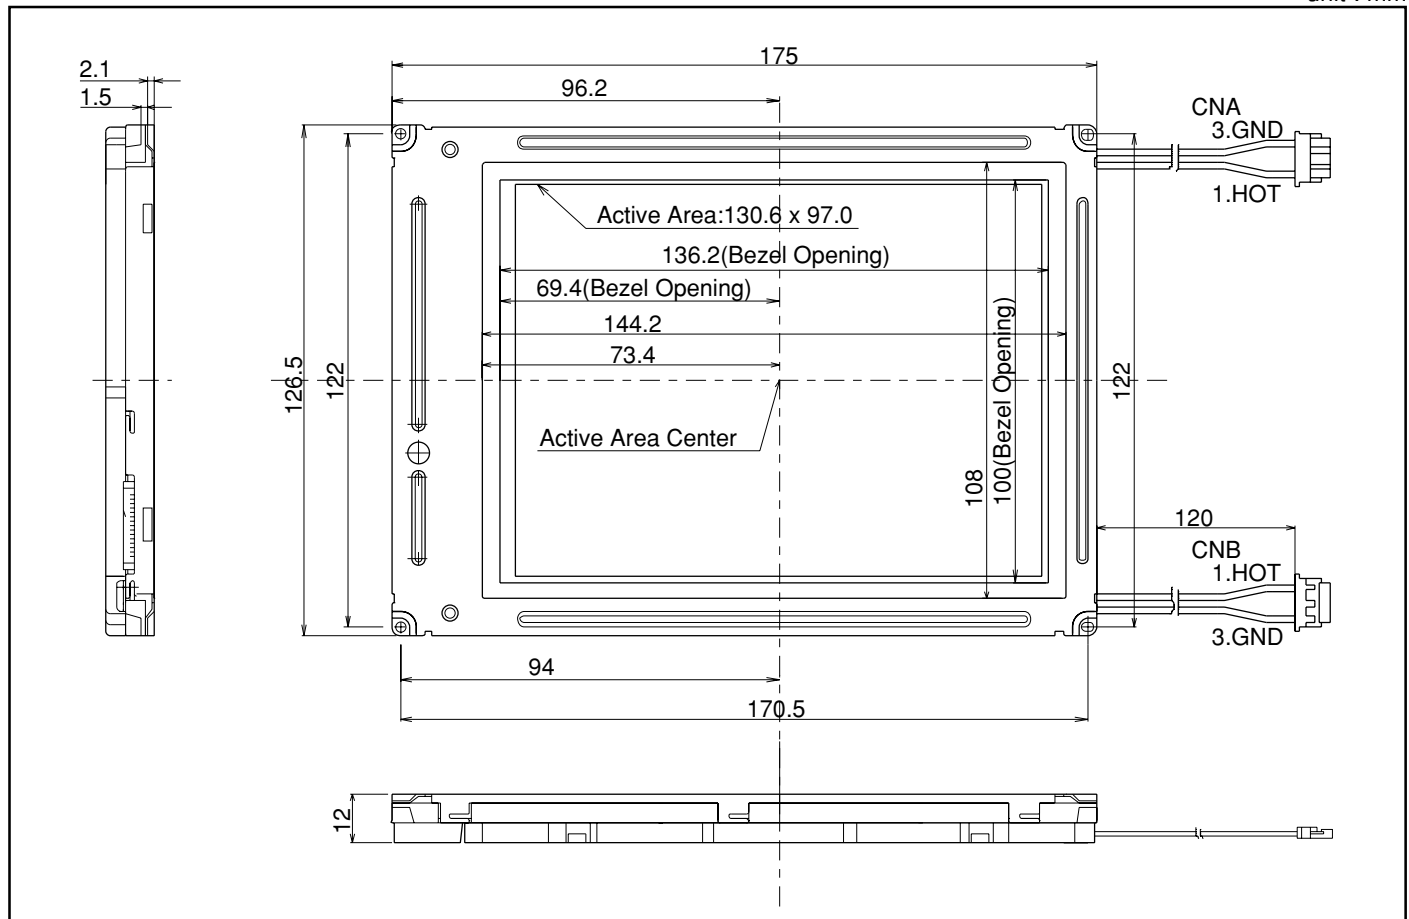

**SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

---

# SHARP®

## **NORTH AMERICA**

---

SHARP Microelectronics  
of the Americas  
5700 NW Pacific Rim Blvd.  
Camas, WA 98607, U.S.A.  
Phone: (360) 834-2500  
Fax: (360) 834-8903  
<http://www.sharpsma.com>

## **EUROPE**

---

SHARP Microelectronics Europe  
Sonninstraße 3  
20097 Hamburg, Germany  
Phone: (49) 40 2376-2286  
Fax: (49) 40 2376-2232  
<http://www.sharpsme.com>

## **ASIA**

---

SHARP Corporation  
Integrated Circuits Group  
2613-1 Ichinomoto-Cho  
Tenri-City, Nara, 632, Japan  
Phone: +81-743-65-1321  
Fax: +81-743-65-1532  
<http://www.sharp.co.jp>